


Gensets of RIGAS DIZELIS DG make, based on RDS marine engines have been designed with two things in mind – durability and cost effectiveness. The core of the engine is of German origin, marinized tested and certified in-house using carefully selected EU components.

RIGAS DIZELIS DG RDS marine gensets have been designed and developed to operate in diverse sea conditions. Certification by all major classification authorities is available.

### Description & Key Scope

- Common bed frame, manufactured of electro welded steel profiles
- Control panel (on genset frame)
- Vibration isolators between generating set and base frame
- Heat exchanger cooling system
- Engine heater
- 24V starter, engine-driven charging alternator
- Flexible compensator and silencer
- Alternator anti-condensation heater
- Drawing & Manual package
- Factory Test Report
- Factory Quality Certificates
- Certificates from RS (IACS member) and RRR are available

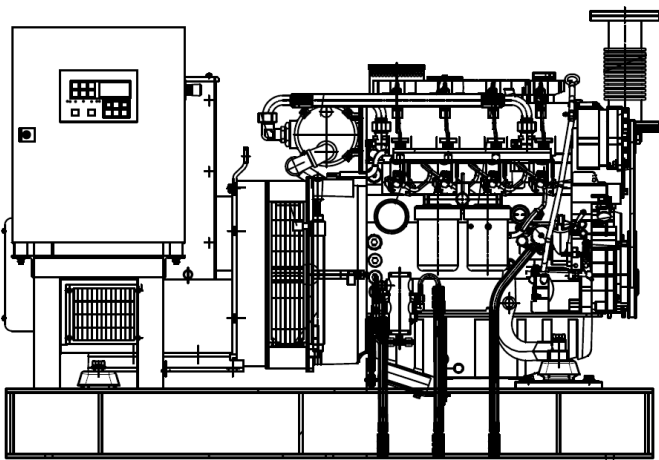

Genset model	PRP*, kWe	Fuel consumption (100% load), l/h	Genset model	PRP*, kWe	Fuel consumption (100% load), l/h	Length**, cm	Width**, cm	Height**, cm	Weight**, kg
50 Hz, 400 V, 1500 rpm			60 Hz, 440 V, 1800 rpm						
EM28RDS	28	8.5	6EM30RDS	30	9.9	143	88	108	681

\*\* final dimensions and weight dependent on selected options

### Description & Key Scope

\* Prime Power rated in accordance with ISO 3046-1 in ambient conditions of 45°C and 100kPa  
For continuous operation and unlimited yearly operation at varying load. Max. mean load factor of 70% of rated power over 24h of operation. 1 hour/12 hours period of accumulated peak overload to 110%.

## Engine General Data\*

Maker	Rigas Dizelis DG
Model	4RD3.1TMG
No of cylinders	4 in-line
Working principle	4-stroke
Displacement, L	3.11
Bore x stroke, mm	94 x 112
Compression ratio	17.5:1
Piston speed, m/s	10.45
Aspiration	Turbocharged
Rotation (seen from flywheel end)	Counter clockwise
Flywheel	SAE 3/11,5"
Injection system type	Single injection pump for each cylinder
Governor type	Mechanical
Oil capacity	10 liter
Starter type	2-pole, 24V, DC

\* Other engine parameters are available on request.

## Alternator General Data\*\*

Maker	STAMFORD (CUMMINS) LEROY-SOMER (other brands on request)
Poles	4
Cos $\varphi$	0.8
Coupling	Direct
Insulation class	H
Temperature Rise class	F/H
Execution	Brushless
Standard protection	IP23

\*\* Other alternator parameters are available on request.

## Available Key Options (other options are available on request)

### Engine

- Radiator cooling system (for Emergency / Harbour gensets)
- Manual lub oil drain pump
- Starting batteries
- Static battery charger
- Air, spring or hydraulic starter
- Duplex fuel filters
- Electronic governor

### Alternator

- Winding temperature measuring
- Quadrature droop kit for parallel operation
- Air filter
- IP44 protection

### Control

- Remote control panel
- Potentiometers for remote engine speed and alternator voltage regulation

### Other

- Installation in soundproof and weathertight canopy or container
- Special tools and spare parts
- Commissioning and start-up
- Extended warranty



**ANNO 1949**

Address: 36 Ganibu dambis, Riga, Latvia, LV-1005  
Telephone: +371 67391781, +371 67381626  
Fax: +371 67381925  
E-mail: sales@rigasdizelis.lv  
Website: www.rigasdizelis.lv